

SE4942A

N-Channel Enhancement-Mode MOSFET

Revision: A

General Description

High Density Cell Design For Ultra Low On-Resistance Fully Characterized Avalanche Voltage and Current Improved Shoot-Through FOM

- I Simple Drive Requirement
- I Small Package Outline
- I Surface Mount Device


Features

For a single MOSFET

- I $V_{DS} = 40V$
- I $R_{DS(ON)} = 16m\Omega @ V_{GS}=10V$
- I $R_{DS(ON)} = 22m\Omega @ V_{GS}=4.5V$

Pin configurations

See Diagram below

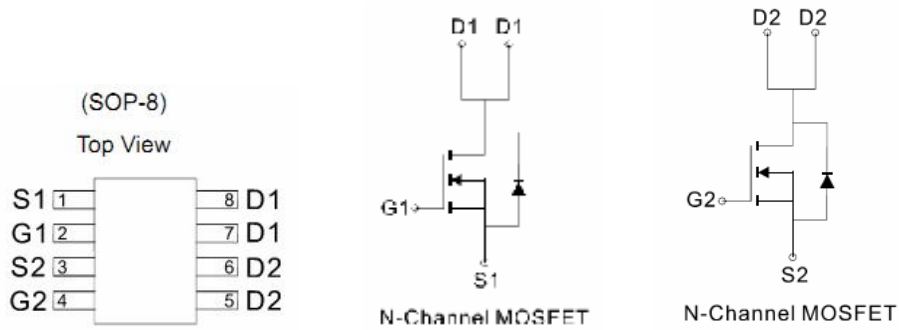







Absolute Maximum Ratings

Parameter	Symbol	Rating	Units
Drain-Source Voltage	V_{DS}	40	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current	I_D	Continuous	8
		Pulsed	32
Total Power Dissipation	@ $T_A=25^\circ C$	P_D	2
Operating Junction Temperature Range	T_J	-55 to 150	$^\circ C$





SE4942A

Electrical Characteristics (T _J =25°C unless otherwise noted)						
Symbol	Parameter	Test Conditions	Min	Typ	Max	Units
OFF CHARACTERISTICS (Note 2)						
B _V DSS	Drain-Source Breakdown Voltage	I _D =250μA, V _{GS} =0 V	40			V
I _{DSS}	Drain to Source Leakage Current	V _{DS} = 40V, V _{GS} =0V			1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =20 V			100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} = V _{GS} , I _D =250μA	1.5		3.0	V
R _{DS(ON)}	Static Drain-Source On-Resistance	V _{GS} =10V, I _D =7.4A	-	16	20	mΩ
		V _{GS} =4.5V, I _D =6.4A		22	29	mΩ
V _{SD}	Diode Forward Voltage	I _S =1.8A		0.8	1.2	V
DYNAMIC PARAMETERS						
C _{iss}	Input Capacitance	V _{GS} =0V, V _{DS} =15V, f=1MHz		884		pF
C _{oss}	Output Capacitance			124		pF
C _{rss}	Reverse Transfer Capacitance			39		pF
SWITCHING PARAMETERS						
t _{d(on)}	Turn-On Delay Time	V _{DD} =20V, R _L =20Ω R _{GEN} =10Ω R _G =6Ω		15		ns
t _{d(off)}	Turn-Off Delay Time			45		ns
t _{d(r)}	Turn-On Rise Time			11		ns
t _{d(f)}	Turn-Off Fall Time			6		ns
Thermal Resistance						
Symbol	Parameter		Typ	Max	Units	
R _{θJA}	Junction to Ambient (each bin with recommended lands)		-	62.5	°C/W	

Typical Characteristics

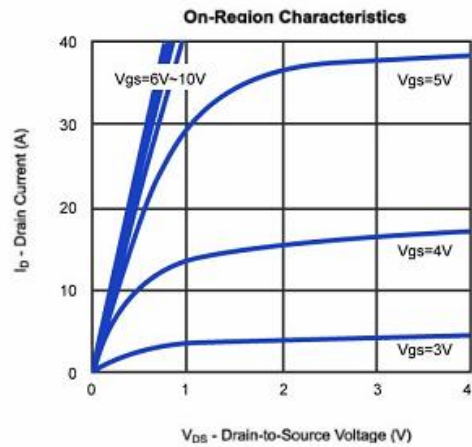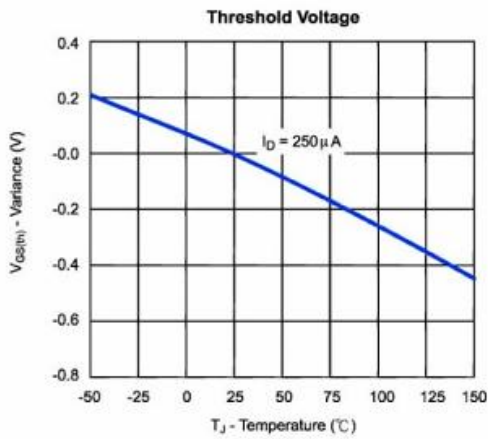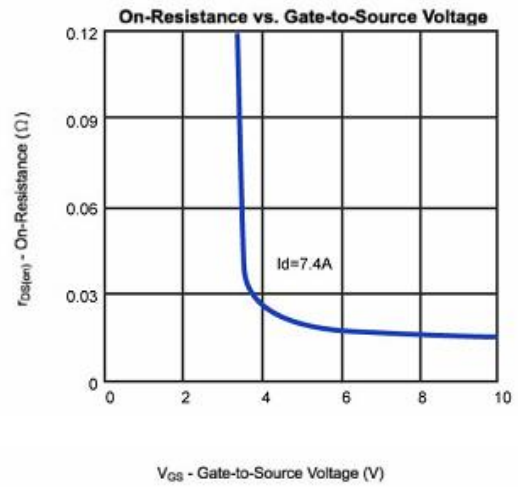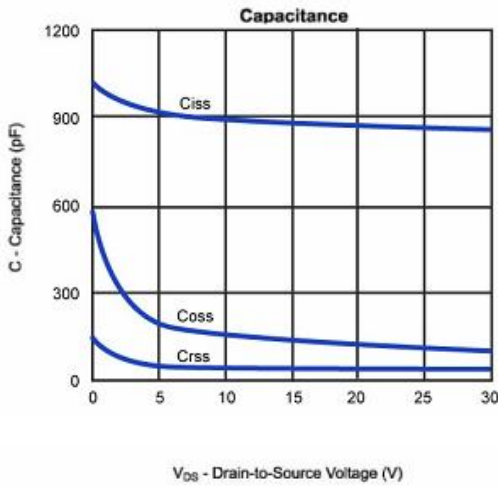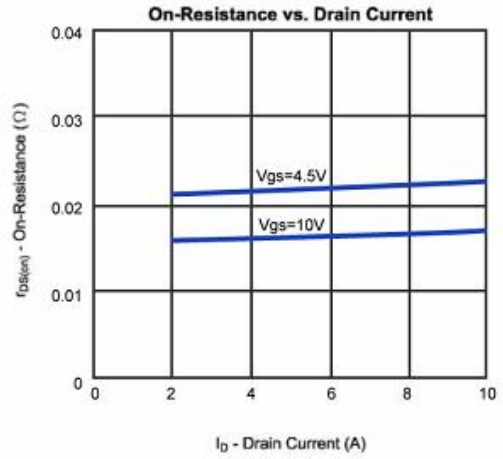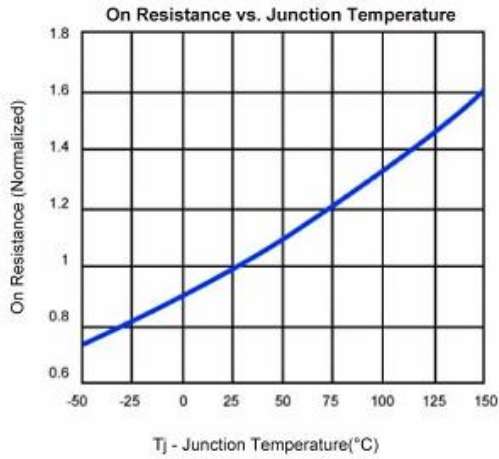


Typical Characteristics

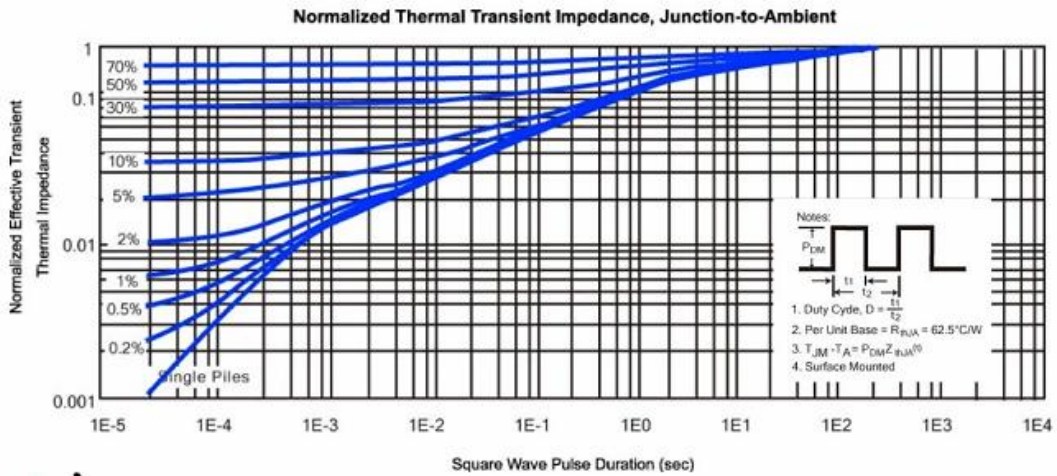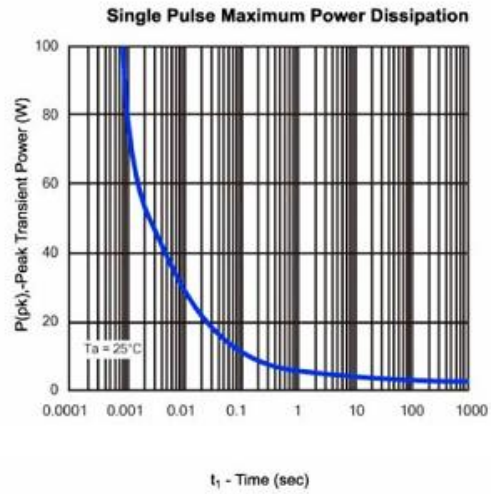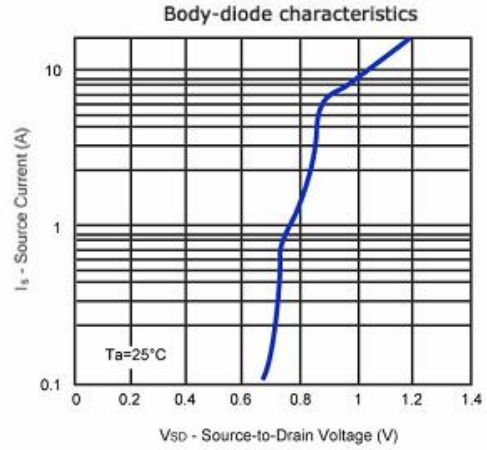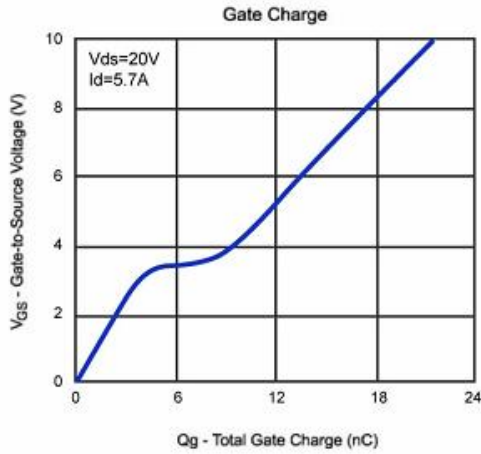


SE4942A

Package Outline Dimension

SOP-8

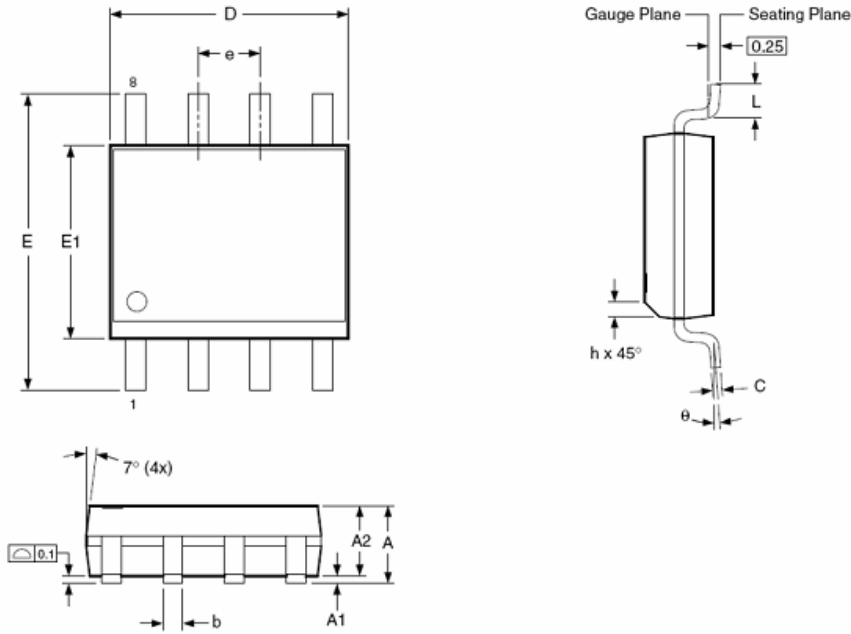

RECOMMENDED LAND PATTERN

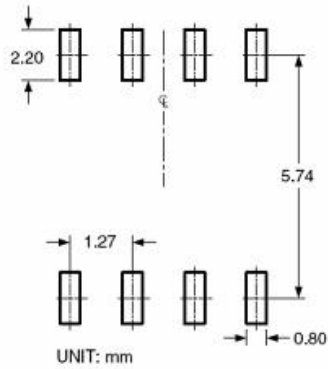

Dimensions in millimeters

Symbols	Min.	Nom.	Max.
A	1.35	1.65	1.75
A1	0.10	—	0.25
A2	1.25	1.50	1.65
b	0.31	—	0.51
c	0.17	—	0.25
D	4.80	4.90	5.00
E1	3.80	3.90	4.00
e	1.27 BSC		
E	5.80	6.00	6.20
h	0.25	—	0.50
L	0.40	—	1.27
θ	0°	—	8°

Dimensions in inches

Symbols	Min.	Nom.	Max.
A	0.053	0.065	0.069
A1	0.004	—	0.010
A2	0.049	0.059	0.065
b	0.012	—	0.020
c	0.007	—	0.010
D	0.189	0.193	0.197
E1	0.150	0.154	0.157
e	0.050 BSC		
E	0.228	0.236	0.244
h	0.010	—	0.020
L	0.016	—	0.050
θ	0°	—	8°

NOTES:

1. Dimensions are inclusive of plating
2. Package body sizes exclude mold flash and gate burrs. Mold flash at the non-lead sides should be less than 6 mils.
3. Dimension L is measured in gauge plane.
4. Controlling dimension is millimeter, converted inch dimensions are not necessarily exact.

SE4942A

**The SINO-IC logo is a registered trademark of ShangHai Sino-IC
Microelectronics Co., Ltd.**

© 2005 SINO-IC - Printed in China - All rights reserved.

SHANGHAI SINO-IC MICROELECTRONICS CO., LTD

Add: Building 3, Room 3401-03, No.200 Zhangheng Road,
ZhangJiang Hi-Tech Park, Pudong, Shanghai 201203, China

Phone: +86-21-33932402 33932403
33932405 33933508 33933608

Fax: +86-21-33932401

Email: webmaster@sino-ic.com

Website: <http://www.sino-ic.com>